

SOLAR LINE IMPEDANCE STABILIZATION NETWORK

SOLAR TYPE 22018-5-TS-500-N


Specifications:

Current rating:.....500 amperes
Inductance:.....5 μ H
Frequency range (recommended):..... 10 kHz – 1.0 GHz
Voltage (line to ground): 1000 VDC, 500 V 50 – 60 Hz, 500 V 400 Hz, 450 V 800 Hz
Power connections: TS 1/2-20 threaded stud
RF connector: Type N
Coupling capacitor:..... 0.10 μ F
Circuit: Single
Case size:..... 10.29" x 9.25" x 20.00" (26.14 cm x 23.50 cm x 50.80 cm)
Overall length with base plate: 23.75" (60.33 cm)

Remarks: Designed for RTCA-DO-160G
Includes an internal 10 μ F feed-thru capacitor on line side.

Specifications are subject to change without notice.

Rev. March 16, 2023

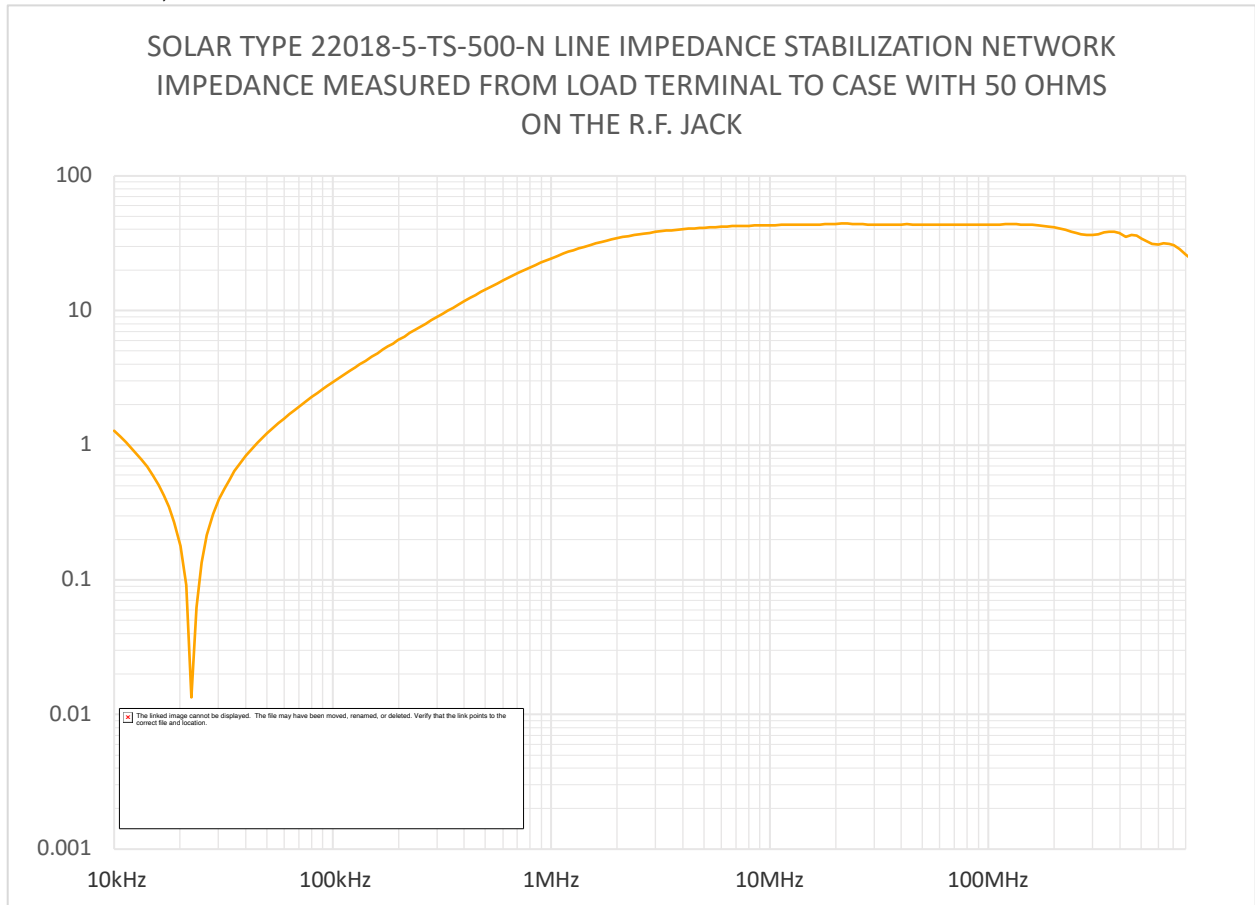

SOLAR ELECTRONICS COMPANY

A Division of A.T. Parker, Inc.

10866 Chandler Boulevard, North Hollywood, CA 91601 818-755-1700 sales@solar-emc.com