

SOLAR LINE IMPEDANCE STABILIZATION NETWORK


SOLAR TYPE 8012-50-R-25-BNC

Specifications:

Current rating: 25 amperes
Inductance: 50 μ H
Frequency range (recommended): 10 kHz – 50 MHz
Voltage (line to ground): 200 VDC, 135 V 50 – 60 Hz, 75 V 400 Hz
Power connections: NEMA AC receptacle and line cord
RF connector: Type BNC
Coupling capacitor: 0.10 μ F
Circuit: Dual
Case size: 5.26" x 5.29" x 10.00" (13.36 cm x 13.44 cm x 25.40 cm)
Overall length with base plate: 12.00" (30.48 cm)

Remarks: Designed for FCC Part 15. Switch provided for testing for each line, terminating other line into 50 ohms. Specifications subject to change without notice.

Rev. September 3, 2016

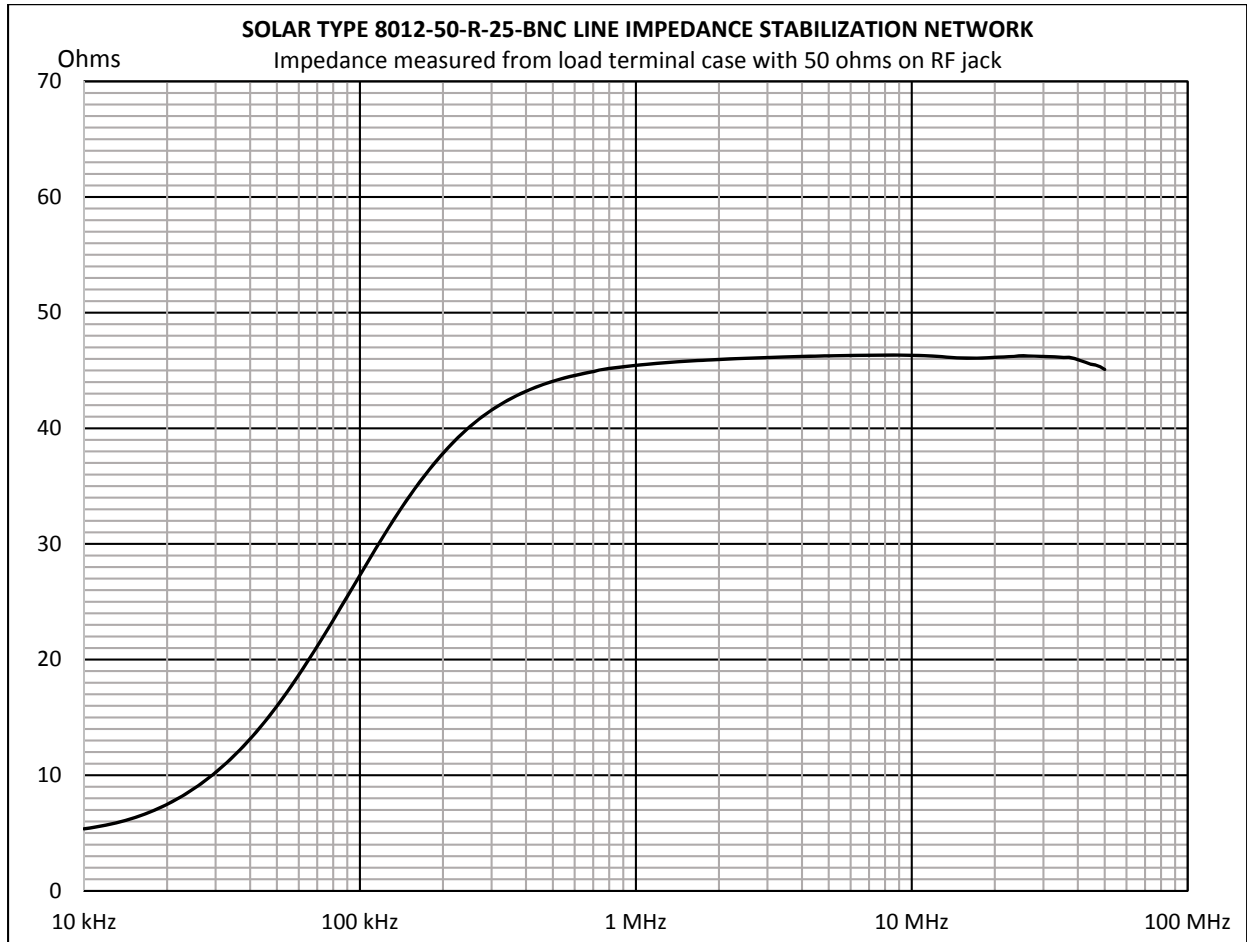

SOLAR ELECTRONICS COMPANY

A Division of A.T. Parker, Inc.

10866 Chandler Boulevard, North Hollywood, CA 91601 818-755-1700 sales@solar-emc.com