

# SOLAR LINE IMPEDANCE STABILIZATION NETWORK


## SOLAR TYPE 9629-50-BP-25-BNC SOLAR TYPE 9629-50-TS-25-BNC

### Specifications:

Current rating: ..... 25 amperes  
Inductance: ..... 50  $\mu$ H  
Frequency range (recommended): ..... 10 kHz – 30 MHz  
Voltage (line to ground): ..... 800 VDC, 500 V 50-60 Hz, 240 V 400 Hz  
Power connections: ..... BP  $\frac{3}{4}$ " standard binding posts, TS  $\frac{1}{4}$ -20 threaded stud  
RF connector: ..... Type BNC  
Coupling capacitor: ..... 0.25  $\mu$ F  
Circuit: ..... Single  
Case size: ..... 5.26" x 5.29" x 10.00" (13.36 cm x 13.44 cm x 25.40 cm)  
Overall length with base plate: 12.00" (30.48 cm)

**Remarks:** Designed for MIL-STD-461D/E/F/G. Specifications subject to change without notice.

Rev. November 10, 2016

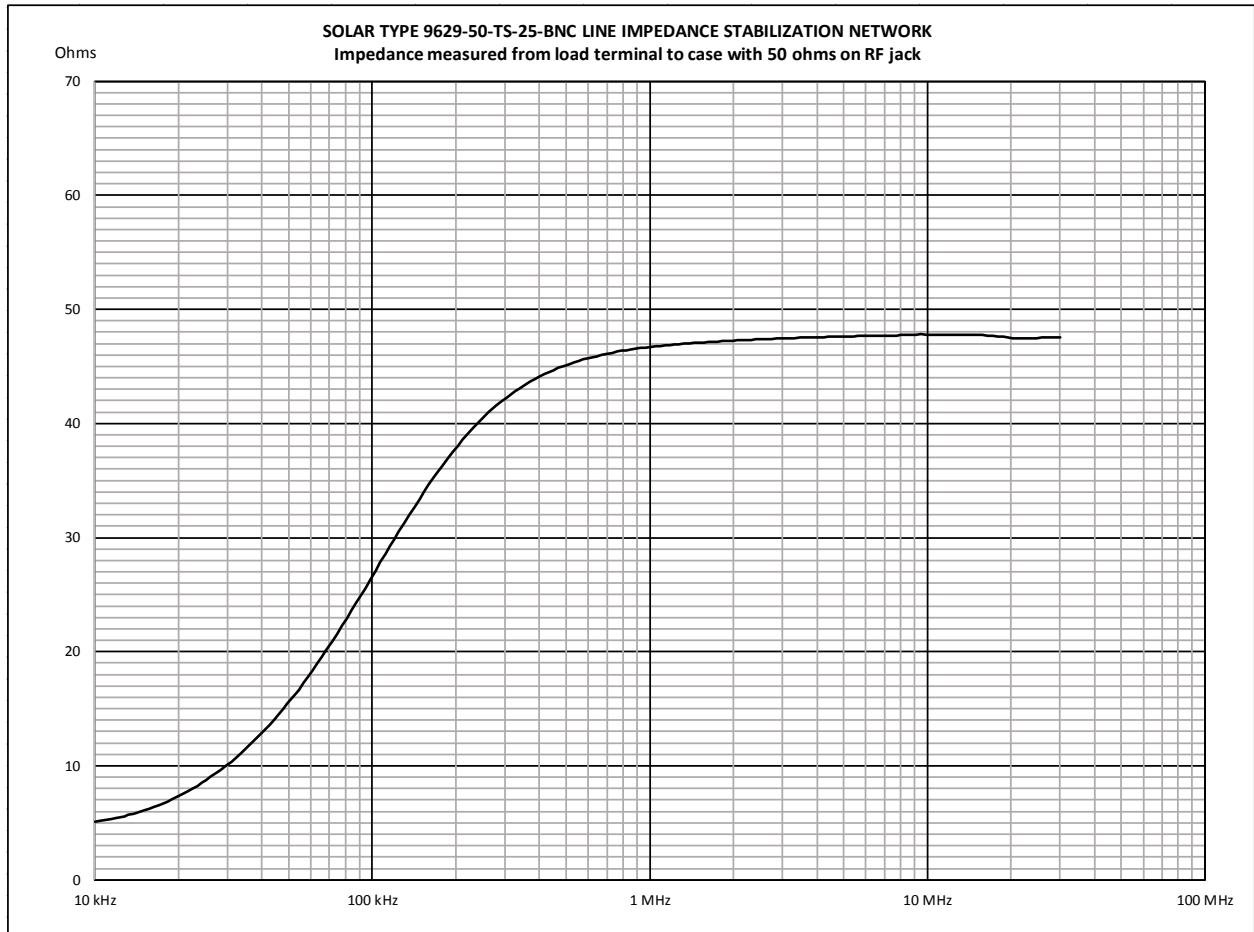

## SOLAR ELECTRONICS COMPANY

A Division of A.T. Parker, Inc.

10866 Chandler Boulevard, North Hollywood, CA 91601 818-755-1700 sales@solar-emc.com